

C Channel 21x41 Bracket



Hot Dip Galvanised

C21		2.0mm		
CODE	Thickness T mm	Length L mm	kg 1 pc	pcs
	2.0	100	0.43	1
	2.0	150	0.51	1
	2.0	200	0.59	1
	2.0	250	0.67	1
	2.0	300	0.75	1
	2.0	350	0.83	1
	2.0	400	0.91	1
	2.0	450	0.99	1

Hot Dip Galvanised

C21		2.5mm		
CODE	Thickness T mm	Length L mm	kg 1 pc	pcs
	2.5	100	0.47	1
	2.5	150	0.57	1
	2.5	200	0.67	1
	2.5	250	0.77	1
	2.5	300	0.87	1
	2.5	350	0.97	1
	2.5	400	1.07	1
	2.5	450	1.17	1

C Channel 41x41 Bracket





Hot Dip Galvanised

C41		2.0mm		
CODE	Thickness T mm	Length L mm	kg 1 pc	pcs
	2.0	100	0.49	1
	2.0	150	0.60	1
	2.0	200	0.71	1
	2.0	250	0.82	1
	2.0	300	0.93	1
	2.0	350	1.04	1
	2.0	400	1.16	1
	2.0	450	1.26	1
	2.0	500	1.37	1
	2.0	550	1.48	1
	2.0	600	1.60	1
	2.0	650	1.70	1
	2.0	700	1.82	1
	2.0	750	1.93	1
	2.0	800	2.03	1
	2.0	900	2.13	1



Hot Dip Galvanised

C41		2.5mm		
CODE	Thickness T mm	Length L mm	kg 1 pc	pcs
	2.5	100	0.55	1
	2.5	150	0.69	1
	2.5	200	0.82	1
	2.5	250	0.96	1
	2.5	300	1.10	1
	2.5	350	1.24	1
	2.5	400	1.38	1
	2.5	450	1.51	1
	2.5	500	1.65	1
	2.5	550	1.79	1
	2.5	600	1.93	1
	2.5	650	2.06	1
	2.5	700	2.20	1
	2.5	750	2.34	1
	2.5	800	2.47	1
	2.5	900	2.60	1

C21

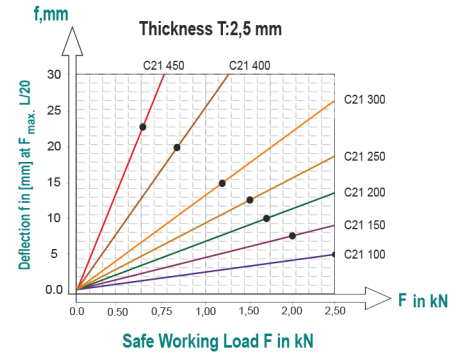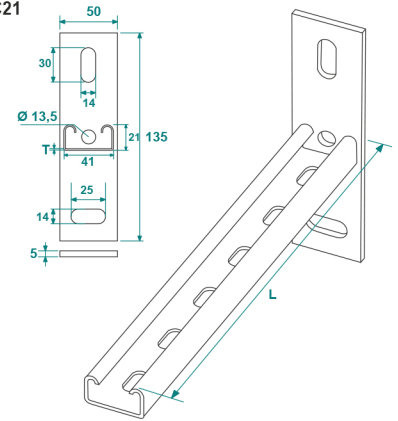

C41

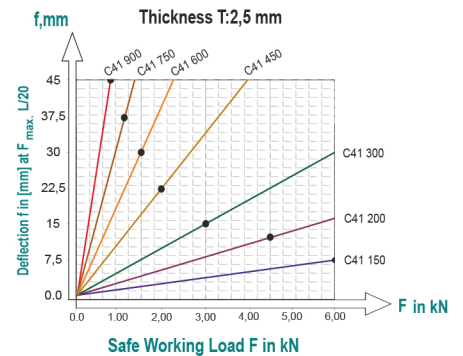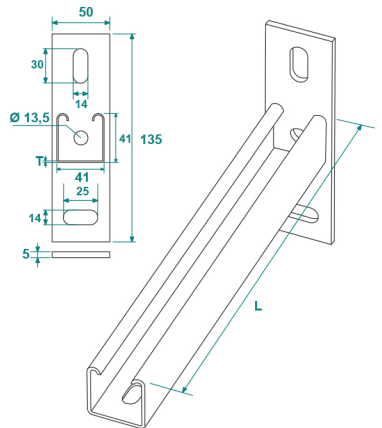

APPLICATIONS

Cable routing / Standard: IEC 61537

MATERIAL

Steel, strip-galv. acc. to TS-EN ISO 1461:2011 (HDG)

Available finishes:

EG: Electro-galvanised (8-12 Micron) EN ISO 2081

SS: Stainless steel AISI 304L and 316L (SS)

EP: Powder coating in a full range of colours (RAL)

Thickn. (ga) [mm]: **2.0** 2.5